



VHF AND UHF TRANSCEIVERS

**IC-F3003**

VHF transceiver

**IC-F4003**

UHF transceiver

## *Affordable, high performance radio that offers abundant features*

### Simple operation for instant communication

The IC-F3003 series is so easy to use there's no special training required. The few knobs and buttons are generously sized for easy operation and are designed to provide non-slip, positive action – even while wearing gloves.

### Easy to hear in noisy areas

The built-in bridge-tied load (BTL) amplifier offers powerful 800mW\* audio output from the large 45mm speaker. The radio delivers loud and intelligible audio even in noisy environments.

\* Typical with internal speaker

### Longer operating time

A new high efficiency FET of the IC-F3003 series reduces consumption current and provides 20 hours\* of operating time with the BP-265, 2000mAh battery pack. Even when used with the BP-264, the radio offers 14 hours\* of operating time.

\*Tx:Rx:Standby=5:5:90. Power save function ON.

### Weather resistant, dust protection, military rugged

While the radio is a compact unit with a height of only 111mm, the radio is tested to dust protection and water resistant equivalent to IP54 and 11 categories of MIL-STD-810 environmental test. In short, the IC-F3003 series is built rugged!

### Internal VOX capability for hands-free operation

The radio has the internal VOX capability for hands-free operation. Optional compatible headset with plug adapter cable OPC-2004 can be used with the radio. Also, the VOX gain and VOX delay time are adjustable.

### Selective calling, quiet stand-by and more

2-Tone and 5-Tone signalings give you selective calling, quiet stand-by and other convenient functions with programming. The radio "stun" function disables a radio over the air and the "revive" function restores the stunned radio.

### Scan features

The priority scan allows you to monitor one or two priority channels while scanning other non-priority channels. The Tx channel and talk back functions allow you to make a quick response while scanning.

### Other features

- DTMF autodial
- CTCSS/DTCS encoder/decoder
- BISS PTT ID transmission
- MDC PTT ID and emergency
- Low battery alert
- 2-step power save
- PC programmable
- Time out timer
- Talk around function
- Lone worker function
- Enhanced emergency
- 3-color LED
- Surveillance function



Dust Protection



Water Resistance



Limited functions.

**SPECIFICATIONS**

	IC-F3003	IC-F4003
<b>GENERAL</b>		
Frequency coverage	136–174MHz	350–400MHz 400–470MHz 450–520MHz
Number of channels	16 channels	
Type of emission	16K0F3E/11K0F3E	
Channel spacing	12.5/25 kHz	
PLL channel step	2.5/3.125kHz	5/6.25kHz
Power supply requirement	7.2V DC nominal	
Current drain (approx.)		
Tx High	1.3A	1.3A
Rx Max. audio	330mA (Internal SP)	330mA (Internal SP)
Standby	75mA	70mA
Antenna impedance	50Ω	
Operating temperature range	–30°C to +60°C (Radio only)	
Dimensions (W×H×D)	58×111×31.0 mm (With BP-264)	
(Projections not included)	58×111×35.5 mm (With BP-265)	
Weight (approx.)	330g (With BP-264) 270g (With BP-265)	
<b>TRANSMITTER</b>		
Output power (at 7.2V DC)	5W, 2W, 1W (Hi, L2, L1)	4W, 2W, 1W (Hi, L2, L1)
Max. frequency deviation	±5.0/±2.5kHz (Wide/Narrow)	
Frequency stability	±2.5ppm	
Spurious emissions	70dB min.	
FM Hum and noise	46/40dB typ. (Wide/Narrow)	
Audio harmonic distortion (AF 1kHz 40% deviation)	1.0/1.5% typ. (Wide/Narrow)	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/8")/2.2kΩ	
<b>RECEIVER</b>		
Sensitivity (at 12dB SINAD)	0.25μV typ.	
Adjacent channel selectivity	78/70dB typ. (W/N)	73/65dB typ. (W/N)
Spurious response rejection	70dB min.	
Intermodulation rejection	75dB typ.	74dB typ.
Hum and noise (Without CCITT filter)	54/50dB typ. (W/N)	52/47dB typ. (W/N)
Audio output power (at 5% distortion)		
Internal SP (With 12Ω load)	800mW typ.	
External SP (With 8Ω load)	400mW typ.	
Ext. speaker connector	2-conductor 3.5 (d) mm (1/8")/8Ω	

All stated specifications are subject to change without notice or obligation.

**Applicable U.S. Military Specifications & IP Rating**

Standard	MIL 810F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip	506.4	I, III
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

<b>Ingress Protection Standard</b>	
Dust & Water	IP54 (Dust-protection and water resistant)

**OPTIONS**

Some options may not be available in some countries. Please ask your dealer for details.



Battery packs	Type and capacity	Operating time* (Approx.)
BP-263	AA (LR6) batteries x 6	–
BP-264	Ni-MH, 7.2V 1400mAh	14 hours
BP-265	Li-Ion, 7.4V 1900mAh (min.) 2000mAh (typ.)	20 hours

\* Tx: Rx: standby = 5:5:90. Power save function ON.



**REGULAR CHARGER**  
For BP-264 (Ni-MH battery)  
Charges the BP-264 in 16 hours (approx.).



**RAPID CHARGER**  
For BP-264 (Ni-MH battery)  
Charges the BP-264 in 2 hours (approx.).




**RAPID CHARGER**  
For BP-265 (Li-Ion battery)  
Charges the BP-265 in 2.5 hours (approx.).

\*1 BC-123SA/BC-147SA for 120V AC. SE for 230V AC. SV for 240V AC.



**SPEAKER-MICROPHONES**  
HM-158L : Compact and durable body.  
HM-159L : Full size durable speaker microphone.

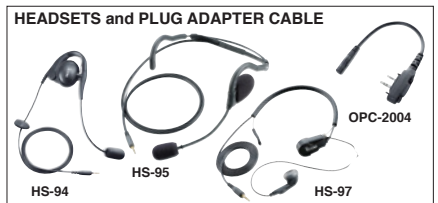

**HEADSETS and PLUG ADAPTER CABLE**  
HS-94 : Earhook headset with flexible boom microphone.  
HS-95 : Behind-the-head headset with flexible boom microphone.  
HS-97 : Throat microphone that fits around your neck and picks up speech vibrations.  
OPC-2004 : Required when using any of these headsets.



**POWER SUPPLY CABLES**  
CP-23L CIGARETTE LIGHTER CABLE  
For use with the BC-191 or BC-193.  
OPC-515L DC POWER CABLE  
For use with the BC-191, BC-192 or BC-193.



**BELT CLIP**  
MB-124  
Alligator type clip.  
Same as supplied.

- STUBBY ANTENNAS**
- FA-SC56VS : 150–162MHz
  - FA-SC57VS : 160–174MHz
  - FA-SC73US : 450–490MHz
- 60–80 mm antennas.
- CUT ANTENNAS**
- FA-SC61VC : 136–174MHz
  - FA-SC61UC : 380–520MHz
- Cut the antenna element to tune to a specific center frequency.
- ANTENNAS**
- FA-SC25V : 136–150MHz
  - FA-SC55V : 150–174MHz
  - FA-SC25U : 400–430MHz
  - FA-SC57U : 430–470MHz
  - FA-SC72U : 470–520MHz
  - FA-SC01U : 350–400MHz

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All trademarks are the properties of their respective holders.

**Icom Inc.**

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world

**Count on us!**

**Icom America Inc.**  
2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone : +1 (425) 454-8155  
Fax : +1 (425) 454-1509  
E-mail : sales@icomamerica.com  
URL : http://www.icomamerica.com

**Icom New Zealand**  
146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062  
Fax : +64 (09) 274 4708  
E-mail : inquiries@icom.co.nz  
URL : http://www.icom.co.nz

**Icom (UK) Ltd.**  
Blacksale House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone : +44 (01227) 741741  
Fax : +44 (01227) 741742  
E-mail : info@icomuk.co.uk  
URL : http://www.icomuk.co.uk

**Asia Icom Inc.**  
6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899  
Fax : +886 (02) 2559 1874  
E-mail : sales@asia-icom.com  
URL : http://www.asia-icom.com

**Icom Canada**  
Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266  
Fax : +1 (604) 952-0090  
E-mail : info@icomcanada.com  
URL : http://www.icomcanada.com

**Icom (Europe) GmbH**  
Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone : +49 (6196) 76685-0  
Fax : +49 (6196) 76685-50  
E-mail : info@icom-europe.com  
URL : http://www.icomeurope.com

**Icom France s.a.s.**  
Zac de la Plaine,  
1 Rue Brindejone des Moulains, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone : +33 (5) 61 36 03 03  
Fax : +33 (5) 61 36 03 00  
E-mail : icom@icom-france.com  
URL : http://www.icom-france.com

**Beijing Icom Ltd.**  
10C07, Long Silver Mansion, No.88,  
Yong Ding Road, Haidian District,  
Beijing, 100039, China  
Phone : +86 (010) 5889 5391/5392/5393  
Fax : +86 (010) 5889 5395  
E-mail : bjicom@bjicom.com  
URL : http://www.bjicom.com

**Icom (Australia) Pty. Ltd.**  
Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone : +61 (03) 9549 7500  
Fax : +61 (03) 9549 7505  
E-mail : sales@icom.net.au  
URL : http://www.icom.net.au

**Icom Spain S.L.**  
Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone : +34 (93) 590 26 70  
Fax : +34 (93) 589 04 46  
E-mail : icom@icomspain.com  
URL : http://www.icomspain.com

**Icom Polska**  
81-850 Sopot, ul. 3 Maja 54, Poland  
Phone : +48 (58) 550 7135  
Fax : +48 (58) 551 0484  
E-mail : icompolska@icompolska.com.pl  
URL : http://www.icompolska.com.pl

Your local distributor/dealer:



Contact ALCOM to discuss your communication needs.  
Bay of Plenty: (07) 345 8655  
FREE Call: 0800 TWO WAY (0800 89 69 29)  
Email: vernon@alcom.co.nz